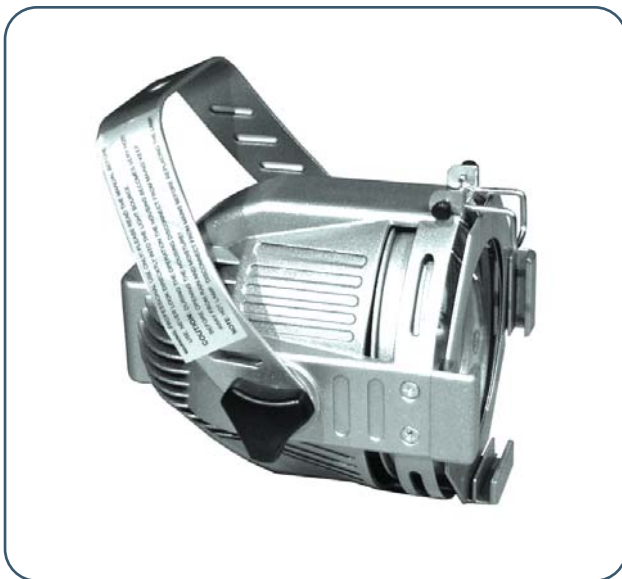


MidiPAR 36

The MidiPAR is a PAR 36 fixture with internal 12 Volt magnetic transformer for pin spot or AR111 lamps



Features

- ▶ 12v 50w Internal Torodial Transformer
- ▶ Suited for such lamps as AR111 to provide outstanding output and long lamp life
- ▶ Compact + attractive cast aluminum housing
- ▶ Available in Titanium Silver and Black finishes
- ▶ 1m power cable and Australian power plug attached
- ▶ Colour Filter Frame included
- ▶ Applications include retail shop-fronts, bar installations, commercial and trade shows.

Order Code







Order Code - KUPPAR475 Black
KUPPAR476 Silver

TECHNICAL SPECIFICATIONS

Power Supply: 240V ~ 50-60 Hz
 Power consumption: 50W Max
 Output Lamp Voltage: 12V
 Lamp Connection: Screw Terminals/ G53
 Dimensions (LxWxH): 150 x 180 x 200mm
 Lamp diameter: 105mm - 115mm
 Lamp Type: PAR 36 Sealed Beam/AR111
 Weight (unpacked): 1.4Kg
 Max ambient temp.: 45° C
 Max housing temp.: 90° C



Possible Lamp Options

	Volts	Watts	Beam Angle	Rated Lamp Life	Colour Temp.	Connection
 Osram HaloSpot 111 IRC AR111 Flood	12v	50w	24°	4000 Hours	3000K	Screw Terminals / G53
 Osram HaloSpot 111 IRC AR111 Spot	12v	50w	8°	4000 Hours	3000K	Screw Terminals / G53
 Osram HaloSpot 111 IRC AR111 Super Spot	12v	50w	4°	4000 Hours	3000K	Screw Terminals / G53
 GE PAR36 Very Narrow Spot (Sealed Beam)	12v	50w	6°	2000 Hours	3000K	Screw Terminals
 GE PAR36 Narrow Spot (Sealed Beam)	12v	50w	9°	2000 Hours	3000K	Screw Terminals
 GE PAR36 Wide Flood (Sealed Beam)	12v	50w	50°	2000 Hours	3000K	Screw Terminals